


Interconnected Remote controller

Overview

The AJ-R1062 is the portable wireless remote controller for the AJ-760SI wireless interconnected smoke alarm. Pressing the "TEST" or "HUSH" buttons on the remote will communicate with your smoke alarms, ensuring a more convenient form of operation.

Having direct control with your smoke alarm means you can test the smoke alarms weekly or monthly with ease. If a nuisance alarm occurs pressing the "HUSH" button once will silence the alarm.

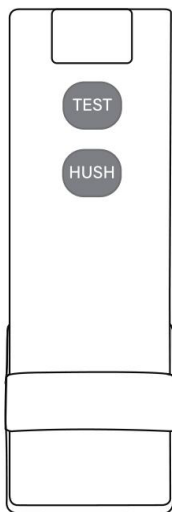

Feature

Wireless 433Mhz Connected
Easy for installation
Compact and portable
Wall Mounted
23A battery powered, replaceable battery

Pairing Operation

It is assumed you have already paired your alarms to each other. If not follow the pairing instructions for smoke alarms below. Then pair your remote control.

Remote Controller

Press and hold the centre button of the smoke alarm, watch for the green light to flash 3 times, release the button. At this time, the red-light on the smoke alarm flashes for one minute and waits for the remote to be paired. On the remote control press and hold the "TEST" button, release it after the Red light flashes twice. The two will now pair. If pairing is successful, the Red LED on the remote will flash 3 times.

Test And Hush Functions

To test your smoke alarm you must be within 3 metres of the alarm. Point the remote towards the alarm and press the TEST button once. Wait 3-5 seconds and the alarm should activate. The alarm will sound for 10 – 15 seconds and stop. Do not press any buttons on the remote or the smoke alarm during this time.

Test your smoke alarms weekly.

If your alarm activates you can hush it with the HUSH button on the remote control. You must be with 3 metres of the alarm to hush it. Do not hush the alarm during testing.

Smoke Alarm Pairing

1. Press and hold the centre button for any alarm products, after the green light flashes three times, release it. At this time, the red light flashes for one minute and waits for the other products to be paired. If you need to end the pairing in advance, press the centre button again.
2. Next press and hold the button for the products to be paired. After the green light flashes twice, release it. If the pairing is successful, it flashes three times. If the products has been paired with other alarms before, it will exit after three long-time flashes after press-and-holding.

Clear Previous Pairing

1. Press and Hold the centre button and wait for the green light to flash for 4 times, release it, wait for the green light to flash for 3 times, the previous pairing has cleared successfully.
2. If the network is cleared successfully the alarm will flash 3 times and exit. Otherwise, repeat the above steps to clear.

Distributed by
On Point Distribution Partners Ltd
58a Poplar Lane
Papamoa
Bay Of Plenty
www.watchmanalarms.co.nz